




#### Table Hardware Kit (1806PO1)

Ltr	Qty	Description
A	8 pcs	Flat Washer
B	8 pcs	Lock Washer
C	8 pcs	Nut Ø5/16"
D	1 pc	Key Wrench



**Detail A**

Table Parts Key		
No	Code	Description
1	1806P01FT	4 pcs. Table Floor Glide
2	1806P02	4 pcs. Table Leg
3	1806P24	1 pc. Table top

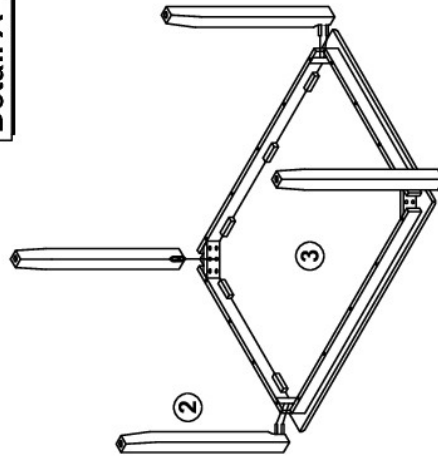

**STEP 1**

- Carefully lay table top upside down on a smooth flat surface to prevent scratches.
- Affix a leg to each corner of the table top as shown in Detail A using a flat washer , lock washer and nut .
- Once all legs are in place, fully tighten the nuts

#### Chair Hardware Kit (1806P46)

Ltr	Qty	Description
A	22 pcs.	Flat Washer
B	22 pcs.	Lock Washer
C	8 pcs.	Nut Ø5/16"
D	2 pcs.	Key Wrench
E	8 pcs.	Long KD. Bolt Øm6x 75mm.
F	6 pcs.	Short KD. Bolt Øm6x 40mm.
G	2 pcs.	Allen Wrench
H	12 pcs.	Screw Ø4 x 38mm



**STEP 1**


**Detail A**



**Detail B**

- Carefully lay chair back flat on a smooth flat surface to prevent scratches.
- Affix the complete seat to chair back, as shown in Detail A, using a flat washer, lock washer and short KD bolt.
- Secure complete seat to chair back corners, as shown in Detail B, using a flat washer, lock washer and long KD bolt. - - Tighten screws with provided Allen Wrench.

\* Quantities noted are for a total of two chairs.



**Detail C**

**STEP 2**

- Carefully turn Chair upside down and attach each Leg to the front corners of the Complete Seat. Noting Right and Left Side Leg.
- Place Flat Washer, Lock Washer and Nut on for each bolt, using provided Key Wrench.
- Do not fully tighten the Nuts at this stage until all the parts are in position (See Detail C).
- Insert 2 Side Stretchers between the Front Legs and Back Legs(Noting Right and Left Side Stretcher), and insert the Front Stretcher between the Front Legs; fasten with Wood Screw using phillip-head screwdriver. (not provided)(See Detail D)
- Be sure to tighten all screws and nuts prior to using Chair.



**DETAIL D**

